



OMAX[®]

A Hypertherm Associates Brand

MAXIEM 1515

JetMachining Center

Fast, smooth, and accurate, the MAXIEM[®] JetMachining Center[®] is ideal for the ambitious shop where new challenges are a permanent driving force. The MAXIEM waterjet system was developed, tested, and built in keeping with the OMAX philosophy to deliver superior performance, expanded versatility, and high productivity at an affordable price. Your MAXIEM can become even more individual thanks to a diverse selection of options, yet remains easy to use for any level of operator. However you customize your MAXIEM, remember that there are no limits to its potential.

Direct drive pump innovation

The advanced direct drive pump paired with the MAXIEM JetMachining Center delivers the most horsepower to the nozzle. With 1000 hours between maintenance cycles, OMAX direct drive pumps are the best choice for reliable and robust ultra high pressure waterjet cutting.

A system designed for your needs

Whether you need a small machine for rapid prototyping, or a large system capable of working with standard sheet and plate sizes for full-scale production, the MAXIEM JetMachining Center is customizable to fit your needs. Regardless of system size, every MAXIEM machine brings the same great performance and high reliability, maximizing your potential.

Innovative IntelliTRAX drive system

The ultimate in durable high-precision motion control, the OMAX IntelliTRAX drive system used on the MAXIEM JetMachining Center incorporates a magnetic linear encoder and an electronic drive control for precise positioning. With a location resolution of one micron, the IntelliTRAX system provides extremely accurate positioning with an innovative feedback/feed-forward control loop. All combined makes IntelliTRAX the ideal motion control system for abrasive waterjets.


Specifications

Machine dimensions	
Footprint (with controller)	00' 0" x 00' 0" to 00' 0" x 00' 0" (0,000 mm x 0,000 mm to 00,000 mm x 0,000 mm)
Weight (tank empty)	21,000 lbs to 51,000 lbs (9,525 kg to 23,133 kg)
Height	11' 0" to 14'0" (3,353 mm to 4,267 mm)
Operating weight	83,000 lbs to 199,000 lbs (37,648 kg to 90,265 kg)

Work envelope	
X-Y cutting travel*	00' 0" x 00' 0" to 00' 0" x 00' 0" (0,000 mm x 0,000 mm to 00,000 mm x 0,000 mm)
Z-Axis travel (with motorized Z-Axis)*	0" (000 mm)
Table size	00' 0" x 00' 0" to 00' 0" x 00' 0" (0,000 mm x 0,000 mm to 00,000 mm x 0000 mm)

Standard model specifications	
Material support slats	0" x 0/0" galvanized steel
Maximum supported material load	000 lbs/sq ft (0,000 kg/sq meter)
Electrical requirements	0-Phase, 000-000 VAC ±00%,00-00 Hz
Noise level	Below 00 dBA at one meter for submerged cutting
Speed	00 in/min (0,000 mm/min)
Linear positional accuracy*	±0.000" (±0.000 mm)
Repeatability*	±0.000" (±0.000 mm)
Ballbar circularity*	±0.000" (±0.000 mm)



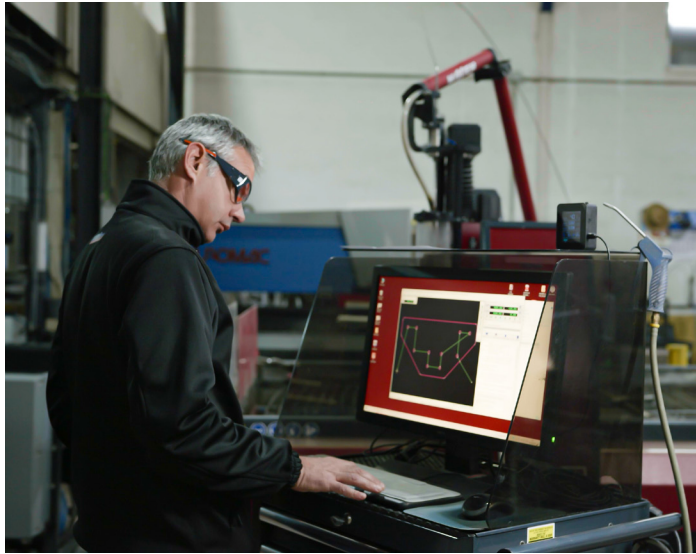

Available accessories

- A-Jet® for bevel cutting up to 60° and advanced taper removal for perfectly square part edges
- Terrain Follower automatically adjusts to accommodate uneven part surfaces. Collision sensing capability is available with Programmable Z cutting heads.
- Rapid water level control for clean and quiet submerged cutting
- Variable Speed Solids Removal System (VS-SRS) for automated solids removal from the catcher tank
- Bulk abrasive delivery hoppers to minimize production downtime

Optional accessories may reduce cutting travel. Photos may show optional accessories. For a complete list of accessories, contact an OMAX sales representative.



For more information, visit: www.omax.com

Unless otherwise noted in the collateral, all trademarks are property of Hypertherm, Inc. and may be registered in the United States and/or other countries. All other trademarks are the properties of their respective owners.

Please visit www.omax.com/patents for more details about Hypertherm Associates patent numbers and types.

© 5/2024 Hypertherm, Inc. Revision 0
MKT101



IntelliMAX Software Suite

For over 20 years, OMAX has invested extensive research and development to provide the most advanced abrasive waterjet software possible. Through software enhancements, your MAXIEM JetMachining Center is capable of advanced 5-axis machining in virtually any material, from aluminum and steel to carbon fiber, titanium, copper, glass, composites, and more.

The IntelliMAX® Software Suite includes LAYOUT, a full-featured CAD design program; MAKE, the highly powerful machine controller software; IntelliVISOR®, the comprehensive system monitoring package; and much more.

- Ease of use: with LAYOUT, the user, whether a novice or an expert, can quickly and easily create a part file. With one click, that part file can be converted into a tool path that is ready for machining.
- Built-in intelligence: In MAKE, detailed reporting provides highly precise estimates on cut times, allowing for accurate job costing.
- Advanced monitoring: Included with the IntelliVISOR system monitoring application, the operator can set up detailed maintenance reminders that minimize downtime and maximize production. Advanced notification features send alerts to email or a smartphone, keeping the operator aware of the machine operation at all times.

World-class service, support and innovation for advanced abrasive waterjet systems

OMAX, part of Hypertherm Associates, sets the standard for service and support in the waterjet machine tool industry. It starts with a rigorous certification program at OMAX in Kent, Washington where OMAX direct and distributor technicians are trained to install, operate and maintain OMAX abrasive waterjet systems. OMAX engineers continue to innovate technology for abrasive waterjet machining, from proven 4th generation pump designs to cutting edge drive systems with micron-level accuracy. Customers have a number of contact options to suit their schedules and needs, including an extensive library of online resources. With the largest abrasive waterjet support network in the world, OMAX continues to shape the future of waterjets.

To see how an OMAX abrasive waterjet system can save you time and money, call or visit our website and request a free part analysis today.

As 100% Associate owners, we are all focused on delivering a superior customer experience. www.hyperthermassociates.com/ownership

Environmental stewardship is one of Hypertherm Associates' core values. www.hyperthermassociates.com/environment

100% Associate-owned

